


Cartridge filter - Ansaugfilter mit Filterpatrone - Filtre à cartouche

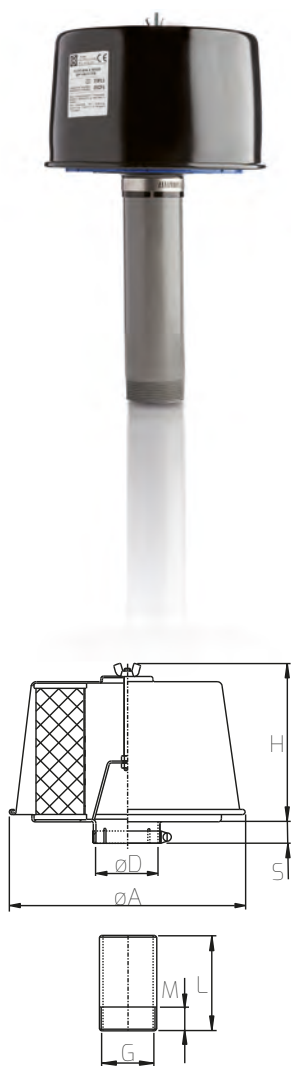


Mod	DN	øA	øD	H	S	G	L	M	Flow Rate Volumenstrom Débit [m³/h]	Weight Gewicht Poids[kg]*
FL 1	15	82	21,5	71	21	G ½"	100	15	25	0,20
FL 2	20	150	27	107	22	G ¾"	130	15	85	0,60
FL 3	25	150	34	107	16	G 1"	140	15	85	0,62
FL 4	32	150	43	107	17	G 1 ¼"	200	15	85	0,61
FL 5	40	203	48,5	153	14	G 1 ½"	200	15	250	1,32
FL 6	50	220	61,5	159	17	G 2"	200	15	400	1,56
FL 8	80	290	89,5	184	35	G 3"	200	20	700	2,60
FL 9	100	410	115,5	335	35	G 4"	200	20	1400	6,75
FL 10	125	410	141	335	35	G 5"	200	30	2800	6,70

Mod	Filter /Filter/ Filtre	øe	øi	h	Weight/Gewicht/Poids[kg]*
CF 1	FL 1	55	25	54	0,05
CF 4	FL 2 FL 3 FL 4	108	55	82	0,20
CF 5	FL 5	147	80	135	0,43
CF 6	FL 6	176	80	135	0,60
CF 8	FL 8	225	100	155	1,00
CF 9	FL 9 FL10	300	215	303	1,90

Filter Element Material Material Filterelement Matériau Élément Filtrant	Degree of Filtration - Nominal Nominale Filterfeinheit [µm] Degré nominal de filtration [µm]
Paper - Papier - Papier	25
Polyester - Polyester - Polyester	10
Stainless steel - Edelstahl - INOX	60

* Standard version filter/cartridge dimensions and characteristic data
 * Abmessungen und technische Daten des Filters/der Patrone in Standardausführung
 * Volumes et données caractéristiques du filtre/cartouche en version standard

Section - Anschlussstück- Section



Mod	DN	G	L	M	Weight/Gewicht Poids [kg]
TR 1	15	G ½"	100	15	0,02
TR 2	20	G ¾"	130	15	0,04
TR 3	25	G 1"	140	15	0,06
TR 4	32	G 1 ¼"	200	15	0,14
TR 5	40	G 1 ½"	200	15	0,16
TR 6	50	G 2"	200	15	0,22
TR 8	80	G 3"	200	20	0,39
TR 9	100	G 4"	200	20	0,50
TR 10	125	G 5"	200	30	1,23